


Slot Together Operating Rods

Traditional 'Slot Together' composite rods for fusing, switching, earthing and tree trimming operations. Available as standard hollow tube, or where company policy dictates, foam filled tube. Top, intermediate and bottom sections are generally held in stock. Spring loaded buttons allow easy assembly of sections, fitting and removal of operating heads and tree pruning equipment.

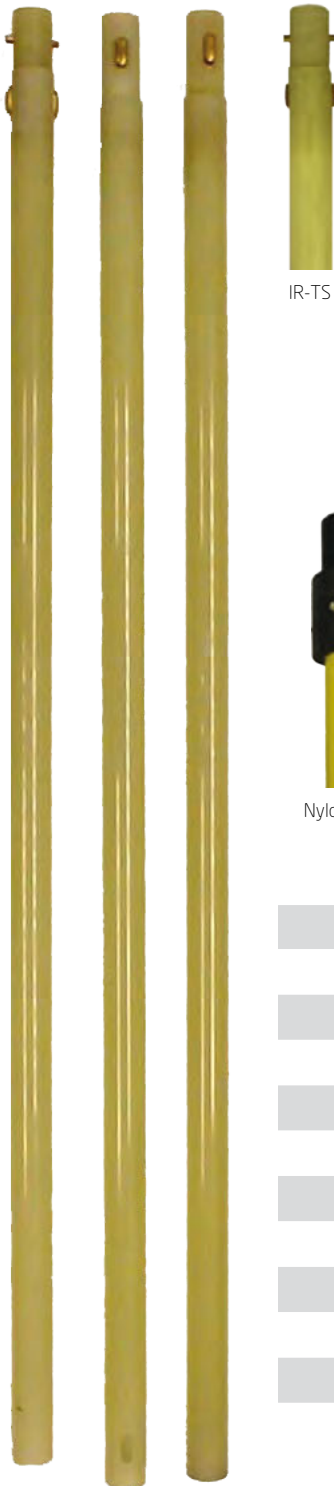

IR-TS

CAT NO	DESCRIPTION
TR-4	4' (1.22m) Top section rod
TR-FF	4' (1.22m) Top section rod foam filled
IR-4	4' (1.22m) Intermediate rod
BR-4	4' (1.22m) Bottom section rod
B54X7CW2P-REIN	Canvas storage bag with reinforced base and 2 pockets
B56X7RW2P	Vinyl storage bag with 2 pockets
IR-TS	Adapter to convert intermediate section to top section
ROD021	2-Section Telescopic Operating Rod 4'-8' (1.22m - 2.44m)

Other lengths and diameters available upon request.



Nylon Adapter

Universal Head

Sectional Rods

Foam filled lightweight rods, 1 1/4" diameter. Available in 4ft, 6ft, & 8ft lengths. Sections connect and disconnect easily, with one simple button to depress. Top section available with universal head or nylon head, which will accept standard pole head fittings. Bottom section has plastic base cap fitted.

CAT NO	LENGTH	DESCRIPTION
5467-4	4' (1.22m)	Top section with universal head
546-4T	4' (1.22m)	Top section with nylon adapter
5467-6	6' (1.83m)	Top section with universal head
546-6T	6' (1.83m)	Top section with nylon adapter
5467-8	8' (2.44m)	Top section with universal head
546-8T	8' (2.44m)	Top section with nylon adapter
546-4	4' (1.22m)	Intermediate section
546-6	6' (1.83m)	Intermediate section
546-8	8' (2.44m)	Intermediate section
552-4	4' (1.22m)	Base section
552-6	6' (1.83m)	Base section
552-8	8' (2.44m)	Base section



Sectional Rods

Slot Together Rods