

Little Mule Strap Hoists


The 6000A Little Mule is the strongest web puller on the market. It is durable and rugged using extra large superior grade webbing with double side plate housing design. Extremely low handle effort provided by special 4:1 gear reduction. Factor of safety 4:1 minimum.

The 344B Little Mule can be rigged with single strap (2000 lb) for increased lift distance, or double strap (4000 lb) for twice the capacity. 360° swivelling hooks equipped with latches for positive load engagement. Compact aluminium alloy frame. Corrosion resistant stainless steel springs and shafts. Enhanced reversing mechanism reduces handle effort required to release or lower a load. Factor of safety 4:1 minimum.



CAT NO	CAPACITY	LIFT	LEVER LENGTH	CAT NO	SINGLE STRAP CAPACITY	SINGLE STRAP LIFT	DOUBLE STRAP CAPACITY	DOUBLE STRAP LIFT	LEVER LENGTH
6000A	2700kg	1524mm	762mm	344B	900kg	1676mm	1800kg	3353mm	610mm

Little Mule hoists are available with standard hooks, hot stick hooks and hot stick and gate latch hooks.

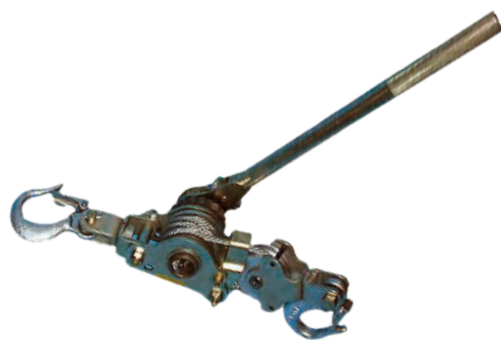

Mini Ratchet Wire Puller

Specially designed and developed to meet the specific needs of linemen for tensioning applications. The units are compact and lightweight, easy to operate in any position and feature a ratchet and automatic brake for secure tensioning.

CAT NO	CAPACITY	No. WIRES	MIN LENGTH	MAX LENGTH	WEIGHT
D-785-10-F	1000kg	2	410mm	1210mm	3.15kg
D-785-15-F	1500kg	2	450mm	1220mm	4.30kg

Webbing Strap Puller

Lightweight, portable web strap lever hoist with fibreglass operating handle is ideal for use in proximity to live conductors. 2 sizes available.



CAT NO	CAPACITY	STRAP SIZE	MIN LENGTH	HANDLE LENGTH	WEIGHT
N1000	10kN	32 x 2mm	400mm	370mm	3.2kg
N1500	15kN	32 x 2mm	400mm	460mm	3.5kg



Lug-All Wire Rope Puller

Highest quality lightweight single or double wire lift. Aluminium alloy frame. Aircraft wire rope - no heavy chains. Reversible handle for ease of use. Drop forged steel hooks.

CAT NO	DOUBLE WIRE LIFT		SINGLE WIRE LIFT		WIRE DIAMETER	LENGTH	WEIGHT
	CAPACITY	MAX LENGTH	CAPACITY	MAX LENGTH			
1000-15SH-UK	-	-	380kg	4550mm	4.6mm	4850mm	3.2kg
3000-10SH-UK	1000kg	1500mm	500kg	3050mm	5.6mm	3500mm	4.0kg
4000-20SH-UK	1400kg	3050mm	700kg	6100mm	6.4mm	670mm	7.0kg
6000-15SH-UK	2000kg	2250mm	1000kg	4550mm	7.9mm	545mm	15.5kg