



GT-12

Contactless voltage tester 50 - 1000V. Features fast, easy, contactless voltage testing, clear LED and acoustic warning signal indicates presence of voltage, ON/OFF switch provides longer battery service life. It is a handy pen format which fits easily into a jacket or tool pocket with a rubber-coated comfort handle. Fast, easy replacement of batteries, automatic self test and auto off function after 5 mins of inactivity. Supplied with 2 x 1.5V AAA batteries.

CAT NO	FREQUENCY RANGE	VOLTAGE RANGE	MEASURING CATEGORY
GT-12	50 - 500Hz	AC 50 - 1000V	CAT IV, 1,000V

GT-16

With all the features of the GT-12 but with a range of 5 - 1000V and the additional benefit of being adjustable to safely detect power and low voltage in outlets, lighting fixtures, wires and cables.

CAT NO	FREQUENCY RANGE	VOLTAGE RANGE	MEASURING CATEGORY
GT-16	50 - 500Hz	AC 5 - 1000V	CAT IV, 1,000V




GT-55E

Bipolar voltage tester with LED display. Features display of AC and DC voltage, bipolar rotary field testing, unipolar phase testing, optical and acoustic, continuity check - optical and acoustic, diode test, polarity display, loud beeper, unique measuring point illumination for working in poor lighting conditions, IP64 - splash water proof and dust tight. Supplied with 2 x 1.5V AAA batteries.

CAT NO	VOLTAGE RANGE	FREQUENCY	MEASURING CATEGORY
GT-55E	6 - 690V AC/DC	0 - 65Hz	CAT III, 1000V; CAT IV, 600V

Test Mate VVD-12 Vibrating Volt Tester

May be used to find a break in a wire or detect the presence of voltage at outlets, light fixtures, circuit breakers, wires and cables, etc. Detects AC voltage (90 - 1000V), uses non-contact method of voltage testing, totally insulated, no exposed metal or conductive parts. Checks for AC voltages without necessity of disconnecting the electrical system. CAT III 1000V. Small size - clips securely and batteries are included. IP65, LED and vibrates.

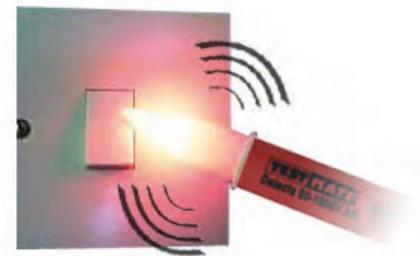

CAT NO	VOLTAGE RANGE	MEASURING CATEGORY
VVD-12	90-1000V	CAT III, 1000V

