

## Anchor Rod Pulling Eye

Made from ductile iron, the anchor rod pulling eye is exceptionally strong with a safe working load of 2700kg with a 5:1 safety factor.

The large offset eye is 50mm long and 35mm wide to accommodate a large pull-lift hook.

The sliding wedge allows adjustment on the grip for rod diameters from 12 to 25mm. By removing the wedge a rod of 32mm can be accommodated.



CAT NO	DESCRIPTION	SWL	WEIGHT
BPE-1	Anchor Rod Pulling Eye	2700kg	2.3kg



## Tensioning Shoe


Special purpose tool that fits at the end of an insulator set when sagging and making off dead ends on wood pole lines.

CAT NO	SAFE WORKING LOAD	WEIGHT
D-325	2000kg	2kg

## Screw Type Ground Anchor

The screw type ground anchor provides secure anchorage points for site equipment. Manufactured in high quality steel and available in 4 sizes.

CAT NO	HELIX DIAMETER	LENGTH	WEIGHT
457-06	150mm	750mm	2.7kg
457-08	200mm	1200mm	6.8kg
457-10	250mm	1500mm	12.2kg
457-12	300mm	1675mm	19.0kg

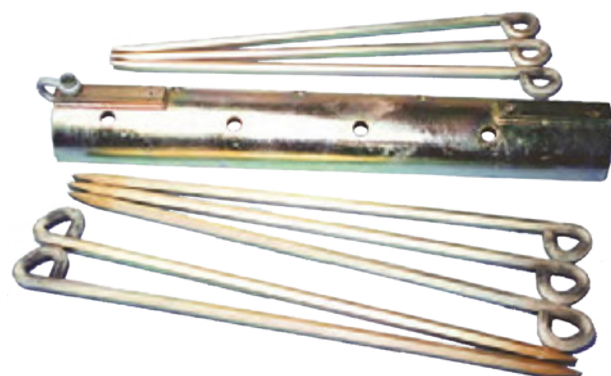

## Pin Type Ground Anchor Set

Designed for use where near horizontal loads are being applied. The ground anchor is secured by inserting 8 large pins.

CAT NO	SAFE WORKING LOAD	WEIGHT
804	3000kg	62kg